N 90, FULLY AUTOMATIC ESPRESSO MACHINE, FLEX DESIGN
CL9TX11X0

- √ Flex Design - coffee machine personalised with separately selectable side trims available in four colours. Optional Twist Pad Flex® sold separately.
- √ Flex Control - whether twisting or turning, the high-resolution interface adapts to you.
- √ Premium 6.8" Full Touch TFT Display - Easy to use and intuitive interface for maximum comfort and control.
- √ Tap Water Connection - Ready to brew when you are.
- √ Coffee World - brew international coffee specialties in the comfort of your own kitchen.

Optional accessories

Z9801TWAY0 Twist Pad Flex, Anthracite Grey, Z9801TWBY0 Twist Pad Flex, Brushed Bronze, Z9801TWDY0 Twist Pad Flex, Deep Black, Z9801TWMY0 Twist Pad Flex, Metallic Silver, ZC045AY0 FlexDesign AG 45 KVA Coffee, ZC045BY0 FlexDesign BB 45 KVA Coffee, ZC045DY0 FlexDesign DB 45 KVA Coffee, ZC045MY0 FlexDesign MS 45 KVA Coffee, ZC060AY0 SC FlexDesign AG 60 WD14 + Coffee, ZC060BY0 SC FlexDesign BB 60 WD14 + Coffee, ZC060DY0 SC FlexDesign DB 60 WD14 + Coffee, ZC060MY0 SC FlexDesign MS 60 WD14 + Coffee, ZC060TY0 SC FlexDesign technical KVA Coffee + WD

installation accessories

ZC060AY0 SC FlexDesign AG 60 WD14 + Coffee, ZC060BY0 SC FlexDesign BB 60 WD14 + Coffee, ZC060DY0 SC FlexDesign DB 60 WD14 + Coffee, ZC060MY0 SC FlexDesign MS 60 WD14 + Coffee, ZC060TY0 SC FlexDesign technical KVA Coffee + WD, Z9801TWAY0 Twist Pad Flex, Anthracite Grey, Z9801TWBY0 Twist Pad Flex, Brushed Bronze, Z9801TWDY0 Twist Pad Flex, Deep Black, Z9801TWMY0 Twist Pad Flex, Metallic Silver, ZC045AY0 FlexDesign AG 45 KVA Coffee, ZC045BY0 FlexDesign BB 45 KVA Coffee, ZC045DY0 FlexDesign DB 45 KVA Coffee, ZC045MY0 FlexDesign MS 45 KVA Coffee

Features

Technical Data

Built-in / Free-standing:	Built-in
Frothing nozzle:	No
Display:	Yes
Water protection system:	Yes
Portion sizes:	All cups
Dimensions:	455x596x385 mm
Dimensions of the packed product (HxWxD):	540x550x670 mm
Required niche size for installation (HxWxD):	449x558x376 mm
EAN code:	4242004262183
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50/60 Hz
Plug type:	Gardy plug w/ earthing

4 242004 262183

N 90, FULLY AUTOMATIC ESPRESSO MACHINE, FLEX DESIGN
CL9TX11X0

Features

Flavour
- up to 29 different coffee specialties (within appliance and Home Connect app)
- warm milk, milk froth and hot water function
- aromaSelect – 3 different aroma profiles (mild-balanced-distinctive)
- adjustable milk ratio for classic milk-mix beverages
- intelligent strength adjustment – adaptive coffee management based on strength and size
- aromaDouble Shot – less bitterness in large beverages due to two brewing processes

Convenience
- Favorites: save up to 30 personalised beverages
- height adjustable bevarage outlet (up to 15 cm (max) high glasses)
- 2.4 l removable water tank

Performance
- ceramDrive – high-quality grinder made of wear-resistant ceramic
- water pump with 19 bar pressure

Hygiene
- autoMilk Clean – automatic steam cleaning after every drink
- calc'nClean – combined descaling and cleaning program for less effort
- removable brewing unit – for easy and hygienic cleaning
- dishwasher-proof: beverage outlet, drip tray and drip pans
- automatic reminder for cleaning, descaling or water filter change

Home Connect
- remote control – operate your appliance from everywhere
- coffeePlaylist – select several drinks in the app, prepared in your chosen order
- additional coffee know-how
- software update – always the newest software status
- online support
- Security: Security is of top priority at Home Connect. The Home Connect app has been tested and certified by TÜV IT. And the encrypted data transfer via Home Connect protocol protects against unauthorised access.
- integrated 0,7 l milk container
- 400 g bean container with aroma protection lid
- adjustable grinding degree (multi-level)
- child lock

Accessories
- included accessories: 1 x test strip

N 90, FULLY AUTOMATIC ESPRESSO MACHINE, FLEX DESIGN
CL9TX11X0

Dimensioned drawings

Measurements in mm

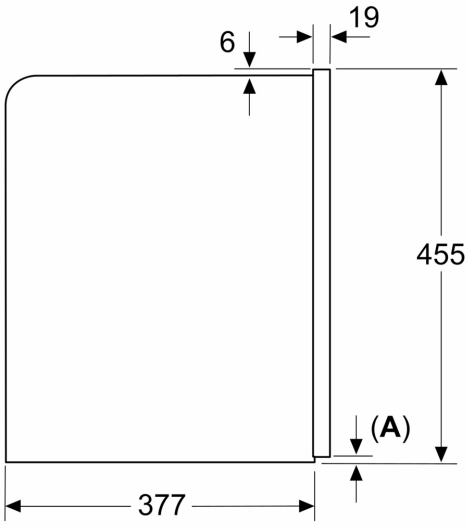

A: 7.5 mm

Measurements in mm

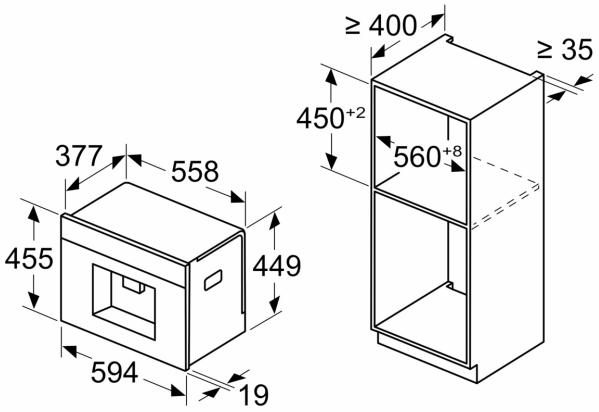

Bean and water containers are removed from the front
Recommended installation height 950–1450 mm

Measurements in mm
Left corner installation

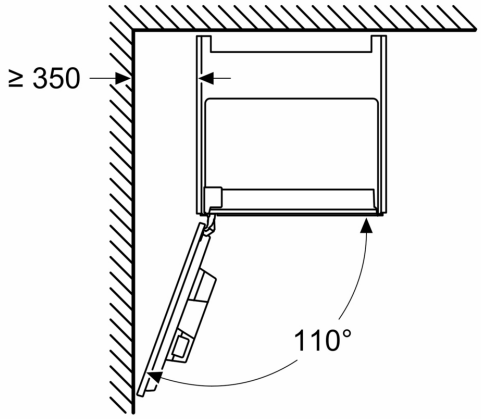

If using the 92° hinge limiter, the min. distance to the wall is only 100 mm

Measurements in mm

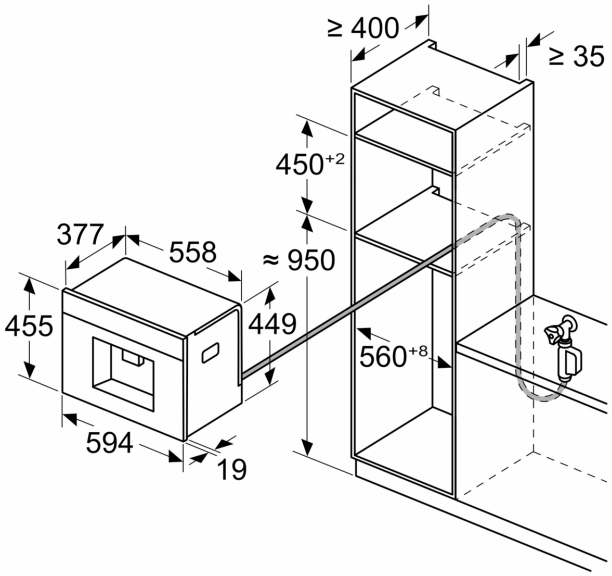

Dimensioned drawings

Measurements in mm

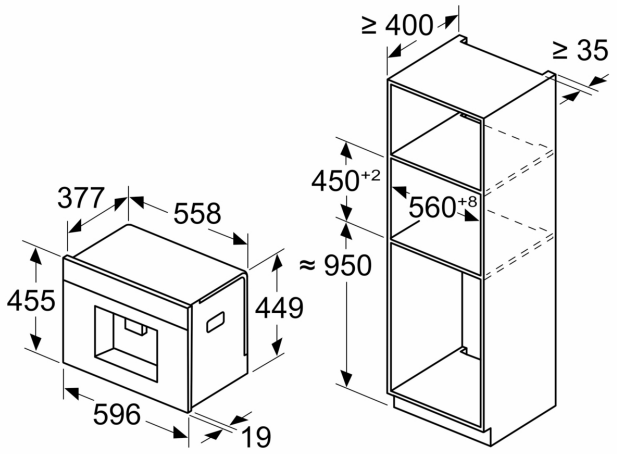

Bean and water containers are removed from the front
Recommended installation height 950–1450 mm